



# Flat - V


DESIGN ANDREA CROSETTA

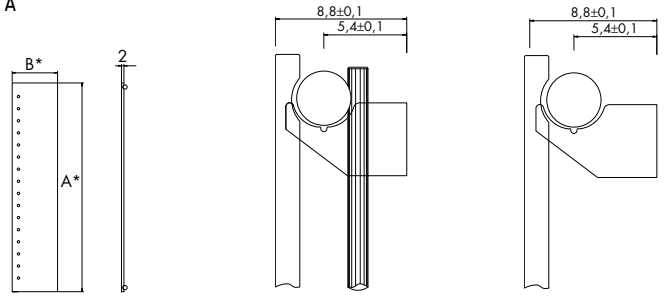


**[X]** attacco standard  
standard connection  
raccord standard  
standard Anschluss  
conexión estándar

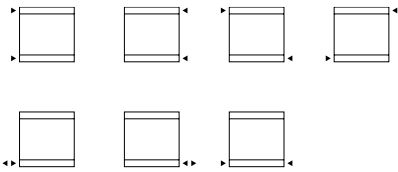

**[B]** attacco speciale  
special connection  
raccord spéciale  
speziell Anschluss  
conexión especial



**[B5]** attacco interasse 5 cm  
pipe centres 5 cm  
raccords 5 cm  
5 cm Achsabstand Anschluss  
conexión entre ejes: 5 cm.



P\* 122/124

A* cm	inches	B* cm	inches	l* cm	inches	l* cm	inches	art*	L*	BTU Δt 50°	watt Δt 50°
<b>verticale / vertical / verticale / vertikal / vertical</b>											
172.5	67.9	37.5	14.8	45.8	18.0	166	65.4	FL13000S170015B	2.8	2 038	598
172.5	67.9	49.5	19.5	57.8	22.8	166	65.4	FL13000S170020B	3.7	2 717	797
172.5	67.9	66.3	26.1	74.6	29.4	166	65.4	FL13000S170027B	5.0	3 669	1 076
202.5	79.7	37.5	14.8	45.8	18.0	196	77.2	FL13000S200015B	3.2	2 365	694
202.5	79.7	49.5	19.5	57.8	22.8	196	77.2	FL13000S200020B	4.2	3 154	925
202.5	79.7	66.3	26.1	74.6	29.4	196	77.2	FL13000S200027B	5.7	4 258	1 249
<b>verticale doppio / double vertical / double verticale / doppelte vertikal / vertical doble</b>											
172.5	67.9	37.5	14.8	45.8	18.0	166	65.4	FL13000D170015B	5.0	3 058	897
172.5	67.9	49.5	19.5	57.8	22.8	166	65.4	FL13000D170020B	6.7	4 076	1 195
172.5	67.9	66.3	26.1	74.6	29.4	166	65.4	FL13000D170027B	9.0	5 502	1 614
202.5	79.7	37.5	14.8	45.8	18.0	196	77.2	FL13000D200015B	5.8	3 541	1 038
202.5	79.7	49.5	19.5	57.8	22.8	196	77.2	FL13000D200020B	7.7	4 719	1 384
202.5	79.7	66.3	26.1	74.6	29.4	196	77.2	FL13000D200027B	10.4	6 373	1 869

A* cm	inches	B* cm	inches	l* cm	inches	l* cm	inches	art*	L*	BTU Δt 50°	watt Δt 50°		
<b>INOX</b>													
<b>verticale / vertical / verticale / vertikal / vertical</b>													
172.5	67.9	37.5	14.8	45.8	18.0	166	65.4	FL13000S170015X	2.8	1 910	560		
172.5	67.9	49.5	19.5	57.8	22.8	166	65.4	FL13000S170020X	3.7	2 547	747		
172.5	67.9	66.3	26.1	74.6	29.4	166	65.4	FL13000S170027X	5.0	3 440	1 009		
202.5	79.7	37.5	14.8	45.8	18.0	196	77.2	FL13000S200015X	3.2	2 217	650		
202.5	79.7	49.5	19.5	57.8	22.8	196	77.2	FL13000S200020X	4.2	2 956	867		
202.5	79.7	66.3	26.1	74.6	29.4	196	77.2	FL13000S200027X	5.7	3 992	1 171		

A\* = altezza / height / hauteur / Höhe / alto B\* = larghezza / width / longueur / Breite / ancho art\* = articolo / model / modèle / Artikel / artículo P\* = pagina / page / page / Seite / página  
l\* = interasse / pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones L\* = contenuto acqua / content / volume / Inhalt / volumen



Ulteriori dettagli  
Further details  
Ulérieures détails  
Weitere Einzelheiten  
Otros detalles

Colori / colours / couleurs / Farbe / colores

[ BIAN ] B standard

T + 10%

S + 20%

[ RAL ] S + 20% RAL non inclusi in tabella / special Ral colours / couleurs Ral spéciales / RAL Farbe nicht in der Tabelle inbegriffen / colores RAL especiales

INOX

Kcal = Watt x 0.860  
BTU = Watt x 3.413

Watt Δt 60° = Watt Δt 50° x 1.267


Watt Δt 40° = Watt Δt 50° x 0.749

Watt Δt 30° = Watt Δt 50° x 0.516


Watt Δt 20° = Watt Δt 50° x 0.305

p max = 10.0 bar


P\* 120

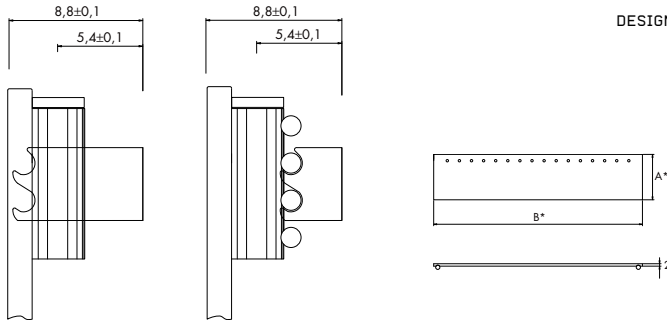


**[X]** attacco standard  
standard connection  
raccord standard  
standard Anschluss  
conexión estándar

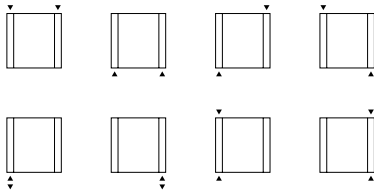

**[B]** attacco speciale  
special connection  
raccord spéciale  
speziell Anschluss  
conexión especial



**[B5]** attacco interasse 5 cm  
pipe centres 5 cm  
raccords 5 cm  
5 cm Achsabstand Anschluss  
conexión entre ejes: 5 cm.



P\* 122/124

B* cm	inches	A* cm	inches	l* cm	inches	l* cm	inches	art*	L*	BTU Δt 50°	watt Δt 50°
<b>orizzontale / horizontal / horizontale / horizontal / horizontal</b>											
172.5	67.9	37.5	14.8	45.8	18.0	166	65.4	FO13000S170015B	2.8	2 234	655
172.5	67.9	49.5	19.5	57.8	22.8	166	65.4	FO13000S170020B	3.7	2 976	873
172.5	67.9	66.3	26.1	74.6	29.4	166	65.4	FO13000S170027B	5.0	4 018	1 178
202.5	79.7	37.5	14.8	45.8	18.0	196	77.2	FO13000S200015B	3.2	2 627	770
202.5	79.7	49.5	19.5	57.8	22.8	196	77.2	FO13000S200020B	4.2	3 503	1 027
202.5	79.7	66.3	26.1	74.6	29.4	196	77.2	FO13000S200027B	5.7	4 728	1 386
<b>orizzontale doppio / double horizontal / double horizontale / doppelte horizontal / horizontal doble</b>											
172.5	67.9	37.5	14.8	45.8	18.0	166	65.4	FO13000D170015B	5.0	3 740	1 097
172.5	67.9	49.5	19.5	57.8	22.8	166	65.4	FO13000D170020B	6.7	5 115	1 500
172.5	67.9	66.3	26.1	74.6	29.4	166	65.4	FO13000D170027B	9.0	6 424	1 884
202.5	79.7	37.5	14.8	45.8	18.0	196	77.2	FO13000D200015B	5.8	4 400	1 290
202.5	79.7	49.5	19.5	57.8	22.8	196	77.2	FO13000D200020B	7.7	6 018	1 765
202.5	79.7	66.3	26.1	74.6	29.4	196	77.2	FO13000D200027B	10.4	7 557	2 216

<b>INOX</b>											
B* cm	inches	A* cm	inches	l* cm	inches	l* cm	inches	art*	L*	BTU Δt 50°	watt Δt 50°
<b>orizzontale / horizontal / horizontale / horizontal / horizontal</b>											
172.5	67.9	37.5	14.8	45.8	18.0	166	65.4	FO13000S170015X	2.8	2 095	614
172.5	67.9	49.5	19.5	57.8	22.8	166	65.4	FO13000S170020X	3.7	2 790	818
172.5	67.9	66.3	26.1	74.6	29.4	166	65.4	FO13000S170027X	5.0	3 767	1 105
202.5	79.7	37.5	14.8	45.8	18.0	196	77.2	FO13000S200015X	3.2	2 463	722
202.5	79.7	49.5	19.5	57.8	22.8	196	77.2	FO13000S200020X	4.2	3 284	963
202.5	79.7	66.3	26.1	74.6	29.4	196	77.2	FO13000S200027X	5.7	4 432	1 300

A\* = altezza / height / hauteur / Höhe / alto    B\* = larghezza / width / longueur / Breite / ancho    art\* = articolo / model / modèle / Artikel / artículo    P\* = pagina / page / page / Seite / página  
 l\* = interasse / pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones    L\* = contenuto acqua / content / volume / Inhalt / volumen

Kcal = Watt x 0.860  
 BTU = Watt x 3.413

Watt Δt 60° = Watt Δt 50° x 1.267  
 Watt Δt 40° = Watt Δt 50° x 0.749  
 Watt Δt 30° = Watt Δt 50° x 0.516  
 Watt Δt 20° = Watt Δt 50° x 0.305

p max = 10.0 bar

Colori / colours / couleurs / Farbe / colores

[ BIAN ] B standard

T + 10%

S + 20%

[ RAL ] S + 20% RAL non inclusi in tabella / special Ral colours / couleurs Ral spéciales / RAL Farbe nicht in der Tabelle inbegriffen / colores RAL especiales

INOX

Ulteriori dettagli  
 Further details  
 Ulérieures détails  
 Weitere Einzelheiten  
 Otros detalles



P\* 120